

MISSION DATA CARD							
OPORD		Callsign		Mission		Date/Time	
1061/2022		Panther 5		Training		012000AUG22	
Task	A/G Training					Freq	
AO	Range 75-15					261.35	
Departure				Recovery			
FYTTR LOW				STRYK			
#	Callsign	Pilot		IFF	TCN	LSR	NET
-1	Panther 5-1	Razorback		1511	11Y	1551	01/01

LOADOUT			
A/A	A9X, A120C		GUN 100% HEI-T
A/G	2xA65F, 2xG12		CHF 70
POD	TGP, AT50		FLR 50
TKS	FPU-8A		FUEL 100%

TOLD					
	Takeoff	Target	Joker	Bingo	Land
FUEL	13047			3500	

AIRBASES								
	Name	TCN	ATIS	GND	TWR	RWY	Elev	ILS
Dep	Nellis AFB	12X	270.1	275.8	327.0	21L	1850	109.1
Arr	Nellis AFB	12X	270.1	275.8	327.0	21L	1850	109.1
Div	Creech AFB	87X	290.45	275.8	360.6			

FLIGHTPLAN				
#	Name	Navaid/Coords/DME	ALT	TOT
1	FYTTR	LSV 269/33 (N36 21.440 W115 41.470)	12000	
2	JAYSN	N36 34.425 W116 02.444	20000	
3	Range 75W	N37 26.499 W116 34.275	20000	
4	T75.15	N37 26.589 W116 32.513	5178	
5	Creech	N36 35.208 W115 40.961	15000	
6	STRYK	LSV 282/26 (N36 25.620 W115 30.700)	10000	
7	GASS PEAK	LSV 309/12 (N36 24.140 W115 10.660)	8000	
8	Nellis	N36 14.680 W115 01.500	3500	

COMMS	
Radio	Usage
1	11 ,3 ,4, 16, 4, 3
2	A 22 B 44


SUPPORT					
Tanker					
Callsign		TCN	Freq	ALT	TAS
ARCO 1		113Y	319.8	FL250	450
	Pos	AR-625: MVA 168/77 (N3717 W11802)			
SHELL 2		115Y	360.8	FL250	430
	Pos	AR-635: MLF 260/127 (N3831 W11542)			
AWACS					
Callsign	Freq	ALT	Pos		
MAGIC	377.8	FL270	N3749 W11417 - N3713 W11446		

OTHER FLIGHTS						
Callsign	Mission	Airframe	Freq	TCN	Grpld	Laser
Edelweiss 5	Training	1x AV-8B N/A	264.55	21/84		171X
	AO		Task			

RADIO CHANNELS		
#	Freq	Name
1		Flight/Squadron specific
2	289.4	Nellis Clearance Delivery
3	275.8	Nellis Ground
4	327.0	Nellis Tower
5	385.4	Nellis Approach/Departure West
6	273.55	Nellis Approach/Departure East
7	317.525	Nellis Control -- Sally
8	254.4	Nellis Control-- Lee
9	305.6	SOF Bullseye
10	343.725	EMERGENCY SINGLE FRQ
11	270.1	Nellis ATIS
12	360.625	Creech AFB Tower
13	250.1	HAVE QUICK 13
14	251.1	HAVE QUICK 14
15	252.1	HAVE QUICK 15
16	377.8	Blackjack
17	265.0	KC-135 AR-641A
18	360.8	KC-135MPRS AR-635
19	319.8	KC-135MPRS AR-625
20	300.05	KC-135 AR-231V

RAMROD										
0	1	2	3	4	5	6	7	8	9	
P	H	L	E	G	M	A	T	I	C	
KTC 1400 C										
	0	1	2	3	4	5	6	7	8	9
A	OJSI	UAW	CET	NY	RL	DKP	HB	MG	VF	QX
B	KDRF	GIQ	ELT	HO	PN	BAM	CJ	YS	XU	WV
C	OKCL	TMW	XUD	SE	AJ	PVG	YF	IB	RQ	HN
D	JMIL	CDQ	OWG	HX	VR	YAF	KE	TN	BS	UP
E	WNJH	VPK	DQR	SB	MO	UEY	LX	CI	TA	GF
F	VPKY	HLM	XIN	UF	WC	EGB	RA	OS	DQ	TJ
G	ITDB	OWP	KYG	VX	MS	CFU	LR	NQ	EJ	HA
H	PETQ	ISJ	UVW	OL	GY	XHD	MA	RC	KF	NB
I	UWBS	XLQ	ODK	HE	PV	NJM	GT	RC	FY	AI
J	LBQY	FTM	JUW	DP	VR	ICA	OG	SN	XE	KH
K	JFYT	NMK	GRD	PS	EW	IAV	OQ	CL	XU	HB
L	KYTE	WCF	QHG	UI	LA	ORX	BP	VJ	DM	SN
M	TWRI	VQL	HAX	PK	BJ	GMO	YN	SF	DE	UC
N	ANPS	TXU	GMK	HC	RJ	IWD	BE	FL	OY	QV
O	GNOB	RUH	QTL	SI	ED	VXK	FJ	MC	PY	WA
P	VYTO	KPN	IFS	HD	GQ	WCJ	MX	LE	BR	UA
Q	AXUT	NGB	VDO	QK	EY	IHC	JR	LS	FM	PW
R	IFXT	WCJ	AVY	NQ	UO	DEK	BR	MG	SH	LP
S	WJTC	LEU	KSI	AY	NF	MRG	DQ	HP	VB	OX
T	NWED	QHT	LMY	KV	GA	OIB	XR	CF	UP	SJ
U	XTRC	NJD	HBU	AQ	PS	MFI	EV	OY	LW	GK
V	EQYD	OSX	FMP	KB	WU	HRV	TA	JC	IN	GL
W	EWUV	PFO	SRG	YM	BD	QIN	LC	TH	JK	XA
X	LBKM	XWR	HIV	QC	FT	JPO	YN	GU	DA	ES
Y	NILG	ORC	TWP	MA	EJ	QFK	HU	XY	VS	DB

NAVAIDS				
Id	Name	Channel	Position	Elevation
BCE	Bryce Canyon	75	N3741.35 W11218.23	9040
BIH	Bishop	33	N3722.62 W11821.99	4114
BLD	Boulder	114	N3559.75 W11451.82	3650
BTY	Beatty	94	N3648.54 W11644.86	2925
CDC	Cedar City	120	N3747.24 W11304.90	5463
DAG	Daggett	79	N3457.75 W11634.69	1760
EED	Needles	99	N3445.96 W11428.43	650
GFS	Goffs	91	N3507.87 W11510.59	4019
GRL	Groom Lake	18	N3713.91 W11548.16	4475
HEC	Hector	74	N3447.83 W11627.78	1854
ILC	Wilson Creek	110	N3815.02 W11423.65	9318
INS	Creech AFB	87	N3635.20 W11540.12	3101
LAS	McCarran Intl	116	N3604.78 W11509.59	2142
LSV	Nellis	12	N3614.68 W11501.50	1864
MLF	Milford	58	N3821.62 W11300.79	4977
MMM	Mormon Mesa	90	N3646.16 W11416.65	2120
MVA	Mina	98	N3833.92 W11801.97	7860
OAL	Coale Dale	124	N3800.20 W11746.23	4800
PGS	Peach Springs	57	N3537.48 W11332.67	4754
TPH	Tonopah Muni	119	N3801.84 W11702.01	5330
TQQ	Silverbow	77	N3748.00 W11647.00	5500
UTI	St George	23	N3705.29 W11335.53	2871

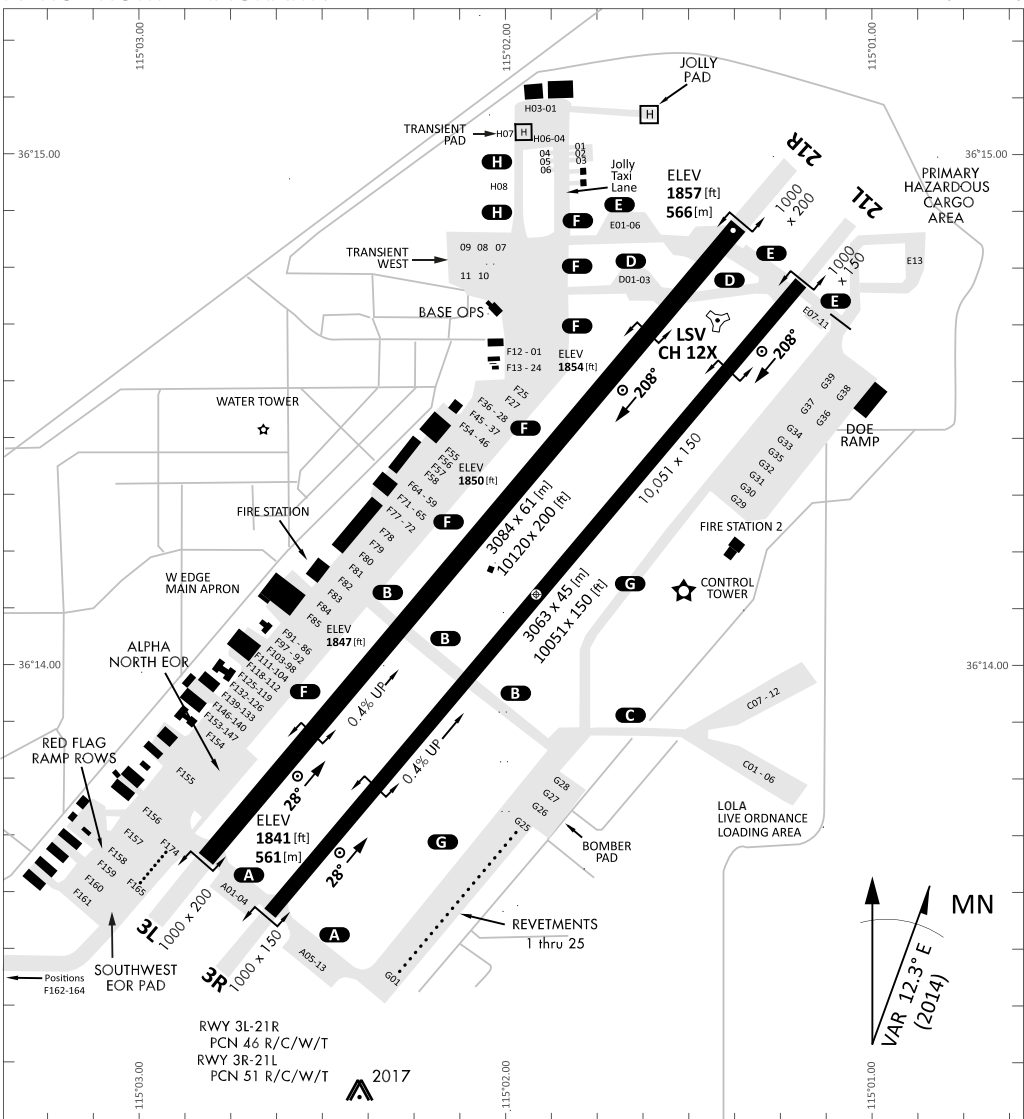

	RWY	CAT	MINIMA		ARP 36° 14.060' N 115° 01.058' W	ELEV 1857 [ft] 566 [m]	Scale 1:35'500					
PAR	21L 3R	A B D E A B D E	2057 - Q.8 200 (200-0.8/1.6) GS 3° 2057 - 0.8 200 (200-0.8/1.6) GS 3°				030060090012001500 [m] 010002000300040005000 [ft]					
SRA	21R 3L	A C D E A C D E	2257 - 1.2 350 (350-1.2/1.6) 2257 - 1.2 350 (350-1.2/1.6)									

RWY		TORA		TODA		ASDA		LDA		PSN THR		ALS
21L		10051 [ft] 3063 [m]		11051 [ft] 3368 [m]		11051 [ft] 3368 [m]		10051 [ft] 3063 [m]		36°14.043' N 115°01.018' W		⊕
3R		10120 [ft] 3084 [m]		11120 [ft] 3398 [m]		11120 [ft] 3398 [m]		10120 [ft] 3084 [m]		36°13.029' N 115°02.038' W		

ATIS		NELLIS GROUND		NELLIS TOWER		NELLIS CONTROL		TACAN		ILS RWY 21L		NELLIS EAST		NELLIS WEST	
270.100 Mhz		275.800 121.800		327.000 132.55		317.525		LSV 12X		109.10 Mhz		384.400		385.000	


ATIS
 270.100
 NELLIS GROUND
 275.800
 NELLIS TOWER
 327.000
 NELLIS CONTROL
 317.525
 NELLIS DEP/APP EAST
 384.400
 BLACKJACK
 377.800

CAUTION: If unable to comply
with restrictions advise ATC
prior to departure.

VMC ONLY

PILOT RESPONSIBLE FOR TERRAIN AVOIDANCE

① 4 NM from RWY 3L/R

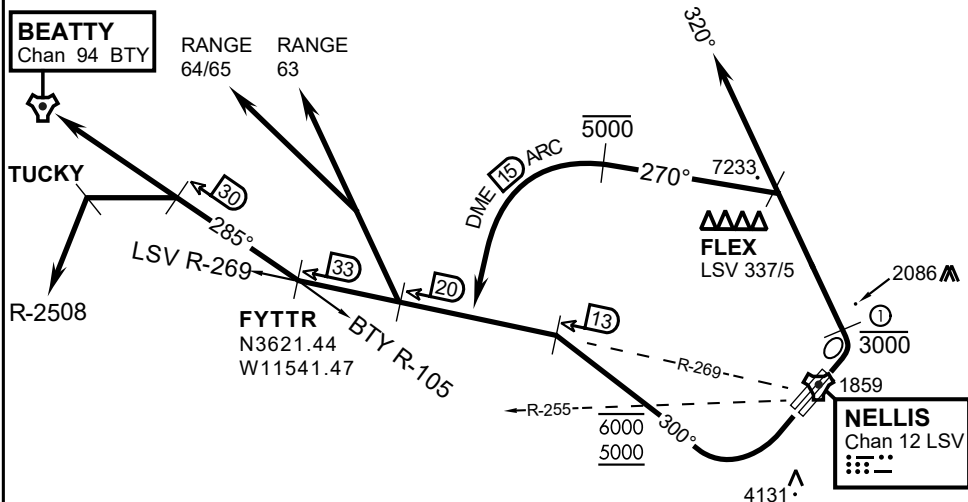

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3L/R:

- Remain below 3,000' MSL until north of Race Track and turned westbound.
- Turn left within 4NM of Nellis direct FLEX. Fly north of FLEX and turn left heading 270°.
- Intercept LSV 15 DME ARC at or below 5,000' MSL.
- ARC south, intercept LSV R-269 outbound. Maintain VFR.

TAKEOFF RWY 21L/21R:

- Follow Noise Abatement Procedures.
- Fly runway heading until past Golf Course, turn right heading 300°.
- Cross LSV R-255 between 5,000' and 6,000' , intercept and proceed outbound on the LSV R-269. Recommend climb to 8,500' MSL or appropriate VFR altitude for overflight of North Las Vegas Training Area. Fly routing for appr. mission/transition.

TRANSITIONS:

R-4806: Turn right at the LSV 269/20 direct to assigned ranges.

BEATTY: Turn right at FYTTR direct BTY via the BTY R-105

R-2508: Turn right at the FYTTR, intercept the BTY 105/30, direct TUCKY, then direct R-2508

FYTTR DEPARTURE AND TRANSITIONS (FYTTR LOW)



APPROACH ROUTE DESCRIPTION

APPROACH RWY 3L/R

Cross STRYK at or above 9,500' MSL, proceed direct GASS PEAK. Cross JORDN at or above 9,500' MSL, cross GASS PEAK at or above 8,500' MSL. Proceed direct SIMNS and cross at 5,500' MSL. Cross Las Vegas Blvd at or above 4,000' MSL then to 3,500' MSL for Initial. Remain within 4 DME if LSV on turn to final.

VFR STRAIGHT-IN RWY 3L/R

Depart CRAIG & descend to be at 3,000' MSL by Las Vegas Blvd. Do not descend below 3,000' MSL until within 5 DME of LSV or 4 NM of the runway on turn to final.

APPROACH RWY 21L/R

Cross STRYK at or above 9,500' MSL, proceed direct GASS PEAK. Cross JORDN at or above 9,500' MSL, cross GASS PEAK at or above 8,500' MSL. Cross APEX at or above 4,500' MSL then direct 5NM initial. Descend to cross PHINN at 4,000' MSL, Inside 5 NM descend to 3,500' MSL.

VFR STRAIGHT-IN RWY 21L/R

Cross APEX at 4,000' MSL. Descend to be at 3,000' MSL at PHINN. Descend to 3,000' MSL at LSV 027/5.

RANGE 63B EXIT

SOUTH: Via NIXON at or above 10,000' MSL, then direct STRYK.

EAST: Via SARAH at or above 10,000' MSL, then direct GASS PEAK.



INDIAN SPRINGS, NEVADA

TACAN INS Chan 87	APCH CRS 065 °	Rwy ldg TDZE 3113	9002 3113 Arpt Elev
----------------------	-------------------	-------------------------	---------------------------

INDIAN SPRINGS AF AUX (KINS)

T	* MISSED APPROACH: Straight ahead to INS TACAN, intercept INS R-outbound, cross 17 DME at or above 9500, then direkt KSV TACAN	114
----------	--	-----

NELLIS CON -	CREECH AFB TOWER 118.30 660.60	GND CON -
-----------------	-----------------------------------	--------------


NOT FOR CIVIL USE

FOR USE UNDER BASIC VFR
WEATHER MINIMUMS ONLY

PILOT IS RESONPSIBLE
FOR TERRAIN/OBSTACLE
AVOIDANCE AND
APPROPRIATE VFR CLOUD
CLEARANCE FOR ALL

CAUTION: Descent gradients
are greater than allowed under standard
TERPS criteria and inbound course
does not meet straight-in criteria

CAUTION: Final approach course crosses
Runway centerline at MIDFIELD. Maneuvering
left of course required prior to landing. Do not
Maneuver farther north than the INS R- 258

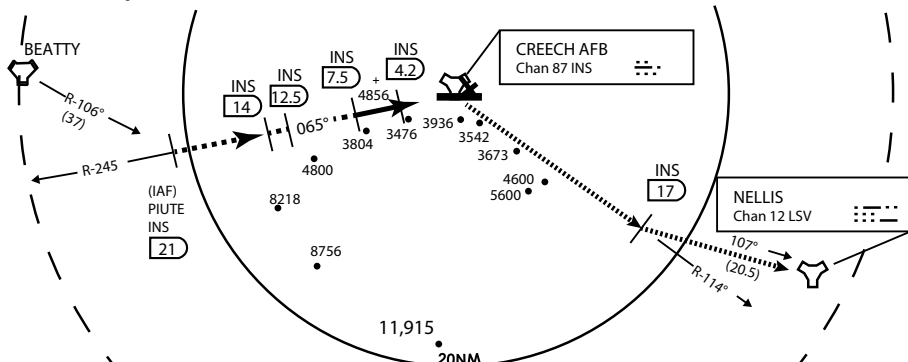

* CAUTION: Missed Approach Climb Rate to 4,700

Knots	60	120	180	240	300
V/V (fpm)	230	460	690	920	1150

Controlling Obstacle

HIGH ALTITUDE FACILITIES

EMERG SAFE ALT 100 NM 14,000

					ELEV 3129	
					MIRL Rwy 8-26	
CATEGORY	A	B	C	D	E	
S-8	3760-1 ½	627 (700-1 ½)	3760-1¾ 627 (700-1¾)	3760-2 627 (700-2)	3760-2¼ 627 (700-2¼)	
CIRCLING	NOT AUTHORIZED					

CITY OF INDIAN, NEVADA

INDIAN SPRINGS AF AUX (KINS)

(FOR DAY VFR USE ONLY)

Modified by vJaBoG 66 for use with DCS

NOT FOR REAL LIFE NAVIGATION



