


ATIS
 254.324
 ANDERSEN GROUND
 275.8
 ANDERSEN TOWER
 233.7
 GCI
 377.8

DEPARTURE ARRIVAL
 5000 2600

VMC ONLY

PILOT RESPONSIBLE FOR
 TERRAIN AVOIDANCE

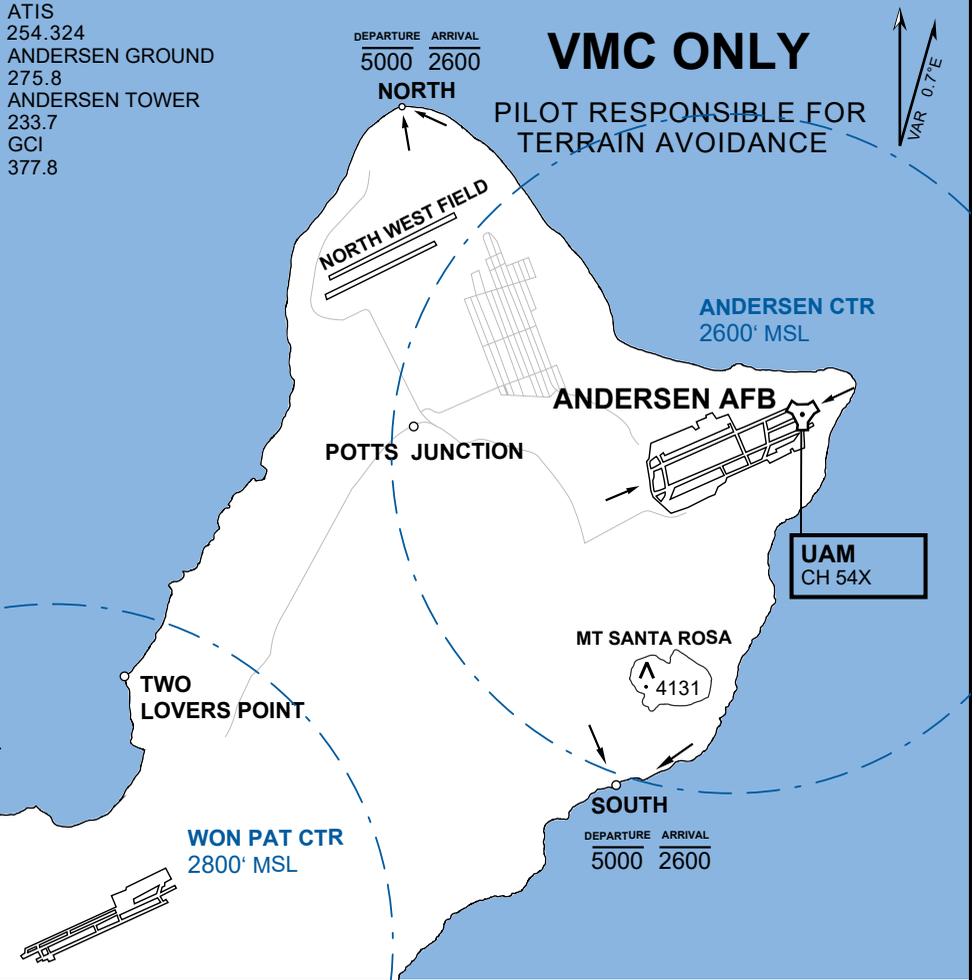

APP/DEP ROUTE DESCRIPTION

DEPARTURE

- At end of runway turn direct exit point, pass NORTH/SOUTH point at 5,000' MSL or below

ARRIVAL

- Pass NORTH point or SOUTH point at 2,600' MSL or below, OHB at 2,100' MSL left or right break acc Runway

Noise Abatement (between 2100lcl-0600lcl):

Avoid overflight of base south of 06R/24L and local populated areas.

RWY 24R/L is primary landing direction. If unable due to wind, do circling app RWY 06L.

Afterburner minimized as soon as practical.